

CCK

Climatic Chamber

- Robust construction
- Volumes between 81 and 2000 liters
- Temperature range from -70°C to +180°C
- Thermal gradients up to 5°C/min.
- Easy to install, easy to use and reliable
- Compliance with standards: UNE, DIN, MIL, ISO,...



Climatic tests on specimens can reproduce the climatic conditions of temperature and humidity, which will be subjected during its lifetime. This will provide for their behavior in environmental conditions of use, transport and storage, preventing defective product hits the market.

DYCOMETAL EQUIPOS CONTROL DE CALIDAD, S.L., the Trademark that has given to their products the commitment that each one of them, depending on its own characteristics, can reproduce faithfully all the environmental conditions that Nature is able to offer to obtain a better Quality of the materials.

DYCOMETAL EQUIPOS DE C.C., S.L.

C/ De la Ciència, 35-37

08840 - Viladecans (Barcelona) - SPAIN

T: (34) 936 526 610 F: (34) 936 407 607

www.dycometal.com

FEATURES

Construction

- Extremely robust
- Built on a steel tube structure and externally based galvanized steel sheet with oven-dried acrylic paint to RAL-9010.
- Interior Sheet Stainless Steel AISI 304 (18/8), completely sealed and seamless interior. Door painted according to RAL-9010.
- Doors with or without sight glass.
- Thermal insulation panels composed of semi-rigid polyurethane foam of high density and very low thermal conductivity, free of chlorofluorocarbons, asbestos and lead oxide and mercury as stipulated by the Environmental Regulations concerning the installation of thermal-acoustic insulation.
- Standard models with capacities from 81 (MINITEST) to 2000 liters.
- 4 multidirectional castors in the base of the chamber to facilitate the movement, and/or vibration height adjustable support (optional depending on model).
- Access port made in PVC with seal cap (different diameters).
- Temperature control by electronic controller with digital read-actual value and setpoint work.
- Temperature measuring by PT-100 Ohm. DIN Class probes
- 2 stainless steel shelves



DYCOMETAL EQUIPOS DE C.C., S.L.

C/ De la Ciència, 35-37

08840 - Viladecans (Barcelona) - SPAIN

T: (34) 936 526 610 F: (34) 936 407 607

www.dycometal.com

CONTROL:

- Programs numbers stored in the memory: 50.
- 500 segments programs.
- Loops number: from 1 to 999 or infinite
- Optimization of work values by PID parameters in cold and heat.
- Direct humidity in%
- Pt-100 probe
- LED screen with alphanumerical keyboard that allows visualize the programmed values. The screen has an ergonomic position, switch and controls.



- Temperature and humidity monitoring which allows programming in sections based profiles using ramp and stabilization.
- The system allows you to save in nonvolatile memory all programmed data, not being affected by power failures.



- Setting alarms. Advise when exceeds a safety limit or for some reason there is any deviation from the programmed conditions.
- Directly reading of the moisture in %RH
- Power Supply Voltage (check depending on the model-phase or three-phase)
- Climatic test Software + PC Cable

DYCOMETAL EQUIPOS DE C.C., S.L.

C/ De la Ciència, 35-37


08840 - Viladecans (Barcelona) - SPAIN

T: (34) 936 526 610 F: (34) 936 407 607

www.dycometal.com

SOFTWARE:

Software for monitoring, data logger programming, graphics, alarms and configuration of the instruments.

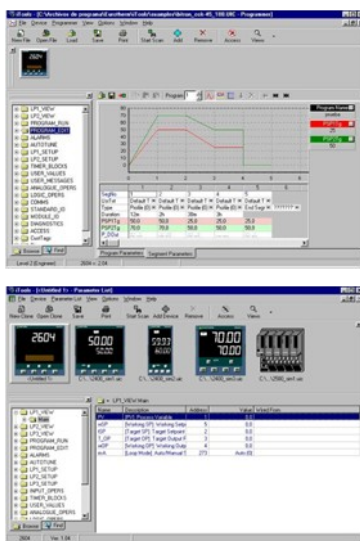

- Record and storage to file.
- Display of existing file.
- Creation and modification of the programs.
- Obtaining of Temperature and Humidity records in digital files with programming of the record interval.
- Record and storage in a file of Essay historical for real values as well as configured alarms.
- Essay Graphical Representation, X-Y type, that shows in the screen the setpoint and the real values, as well as the configured alarms.
- Essay records available to be converted to ASCII format

TECHNICAL SPECIFICATIONS:

MODELS	CCK-40/ CCK-70/		81	125	180	300	480	648	1000	1500	2000
Volume	Liters		81	125	180	300	480	648	1000	1500*	2000*
Workspace	Height	mm	450	500	600	700	800	900	1000	1000	1000
	Width	mm	450	500	600	700	800	900	1000	1000	1000
	Depth	mm	450	500	500	625	750	800	1000	1500	2000
External dimensions	Height	mm	1235	1500	1800	1950	2020	2100	2100	2200	2200
	Width	mm	980	1000	900	1000	1100	1330	1290	1290	1330
	Depth	mm	1050	970	1100	1220	1300	1450	1505	2225	2650
Temperature range	CCK-40/ CCK-70/		from -40°C to 150°C (optional 180°C) from -70°C to 150°C (optional 180°C)								
Temperature change rate Cooling	°C/min		1 (consult for different values)								
Temperature change rate Heating	°C/min		2 (consult for different values)								
Humidity range	%HR		From 10% to 98% (temperatures between 10-85°C)								
Voltage	V		400V (+6%-10%) 3N 50Hz								
Power (kW aprox)	CCK-40	kW	4,3	5,2	6,1	7,8	9,5	10,7	12	16	20
	CCK-70	kW	6	7,5	7,8	9	10,1	11,8	13,4	18	22,9
Weight	Kg		175	210	240	275	360	450	525	780	960
Noise level (dB aprox.)	dB		<60								

*Available with 1 ó 2 doors.

DYCOMETAL EQUIPOS DE C.C., S.L.

C/ De la Ciència, 35-37

08840 - Viladecans (Barcelona) - SPAIN

T: (34) 936 526 610 F: (34) 936 407 607

www.dycometal.com